


DEMS 125

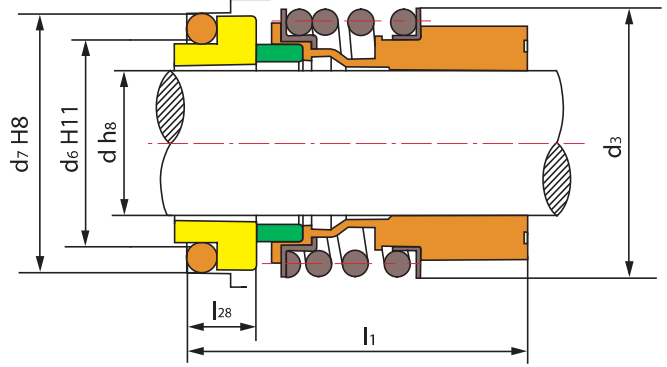

Çalışma Limitleri

Basınç : $\leq 1.2\text{MPa}$
 Hız : $\leq 10\text{m/s}$
 Sıcaklık : $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure : $\leq 1.2\text{MPa}$
 Speed : $\leq 10\text{m/s}$
 Temperature : $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- Döner Yüzey (Carbon/SiC)
- Sabit Eleman (Ceramic/SiC/TC)
- Elastomer (NBR/EPDM/VITON)
- Metal Aksam (SUS304/SUS316)

- Rotary Ring(Carbon/SiC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Metal Parts (SUS304/SUS316)

16

Seal size d(mm)	d ₃	d ₆	d ₇	l ₁	l ₂₈
20	37.0	29	35	45	7.5
22	37.0	31	37	45	7.5
24	42.5	33	39	50	7.5
25	42.5	34	40	50	7.5
28	49.0	37	43	50	7.5
30	49.0	39	45	50	7.5
32	53.5	42	48	55	7.5
35	57.0	44	50	55	7.5
38	59.0	49	56	55	9.0
40	62.0	51	58	55	9.0
42	65.5	54	61	60	9.0
43	65.5	54	61	60	9.0
45	68.0	56	63	60	9.0
48	70.5	59	66	60	9.0
50	74.0	62	70	60	9.5
53	78.5	65	73	70	11.0