


DEMS 920-920A-920B-920C-920D

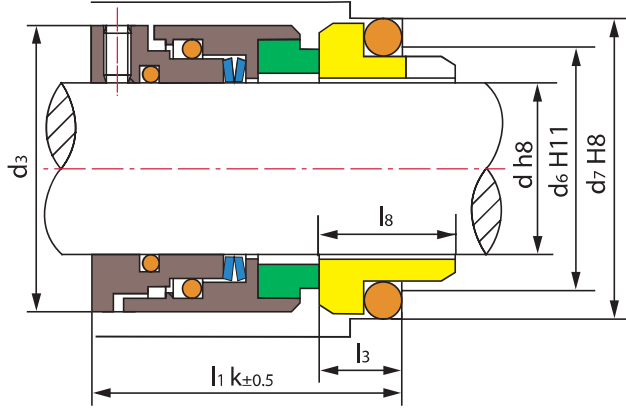

Çalışma Limitleri

Basınç: $\leq 2.5\text{MPa}$
 Hız: $\leq 20\text{m/s}$
 Sıcaklık: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.5\text{MPa}$
 Speed: $\leq 20\text{m/s}$
 Temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- Döner Yüzey (SiC/TC/Carbon)
- Sabit Eleman (SiC/TC)
- Elastomer (VITON/Encapsulated Ring)
- Metal Aksam (SUS304/SUS316)
- Yaprak Yaylı (17-7PH/SUS304/SUS316)

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (SiC/TC)
- Secondary Seal (VITON/Encapsulated Ring)
- Metal Parts (SUS304/SUS316)
- Wave Spring (17-7PH/SUS304/SUS316)

Şeker fabrikası, kağıt endüstrisi ve atık endüstrisi gibi yüksek viskoziteli ve partiküllü ortamlara uygundur.

Medium: Liquid with solid particles and high viscosity, such as sugar refinery, paper and sewage industry.

Seal size d(mm)	d ₃	d ₆	d ₇	l ₈	l _{1k}	l ₃	Seal size d(mm)	d ₃	d ₆	d ₇	l ₈	l _{1k}	l ₃
18	32	27	33	15.0	37.5	7	50	66	62	70	17.0	47.5	9.5
20	34	29	35	15.0	37.5	7	53	69	65	73	17.0	47.5	9.5
22	36	31	37	15.0	37.5	7	55	71	67	75	17.0	47.5	9.5
24	38	33	39	15.0	40.0	7	58	78	70	78	18.0	52.5	10.5
25	39	34	40	15.0	40.0	7	60	80	72	80	18.0	52.5	10.5
28	42	37	43	15.0	42.5	7	63	83	75	83	18.0	52.5	10.5
30	44	39	45	15.0	42.5	7	65	85	77	85	18.0	52.5	10.5
32	47	42	48	15.0	42.5	7	68	88	81	90	18.5	52.5	11.0
33	47	42	48	15.0	42.5	7	70	90	83	92	19.0	60.0	11.5
35	49	44	50	15.0	42.5	7	75	99	88	97	19.0	60.0	11.5
38	54	49	56	16.0	45.0	8	80	104	95	105	19.0	60.0	11.5
40	56	51	58	16.0	45.0	8	85	109	100	110	19.0	60.0	11.5
43	59	54	61	16.0	45.0	8	90	114	105	115	20.5	65.0	13.0
45	61	56	63	16.0	45.0	8	95	119	110	120	20.5	65.0	13.0
48	64	59	66	16.0	45.0	8	100	124	115	125	20.5	65.0	13.0