




DEMS 210



210

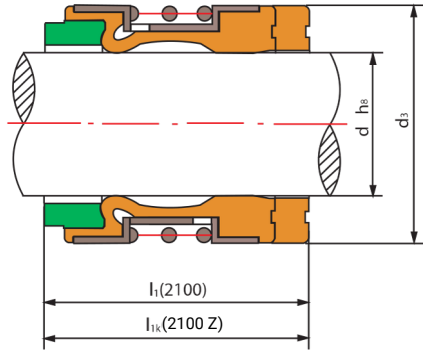

210 Z



M Seat



BS Seat

Çalışma Limitleri

Basınç: $\leq 1.6\text{MPa}$

Hız: $\leq 15\text{ m/s}$

Sıcaklık: $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.6\text{MPa}$

Speed: $\leq 15\text{ m/s}$

Temperature: $-30^{\circ}\text{C} \sim +150^{\circ}\text{C}$

- Döner Yüzey (Carbon/SiC/TC)
 - Sabit Eleman (Ceramic/SiC/TC)
 - Elastomer (NBR/EPDM/VITON)
- Yay ve Diğer Parçalar (SUS304/SUS316)

- Rotary Ring(Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Spring & Other Parts(SUS304/SUS316)

Seal size d(mm)	d ₃	d ₆	d ₇	2100	2100K	M seat	BS seat
				L ₁	L _{1k}	L ₂₈	L ₁₀
10	20	17	21	15	27.5	5	6.0
12	22	19	23	15	26.5	6	6.8
14	24	21	25	15	29.0	6	6.8
15	25	22	26	15	29.0	6	6.8
16	26	23	27	15	29.0	6	6.8
18	32	27	33	20	31.5	6	7.0
20	34	29	35	20	31.5	6	7.0
22	36	31	37	20	31.5	6	7.0
24	38	33	39	20	34.0	6	7.0
25	39	34	40	20	34.0	6	7.0
28	42	37	43	26	36.5	6	7.0
30	44	39	45	26	35.5	7	8.0
32	46	42	48	26	35.5	7	8.0
33	47	42	48	26	35.5	7	8.0
35	49	44	50	26	34.5	8	9.0
38	54	49	56	30	37.0	8	9.0
40	56	51	58	30	37.0	8	9.0
43	59	54	61	30	37.0	8	9.0
45	61	56	63	30	37.0	8	9.0
48	64	59	66	30	35.0	10	11.0
50	66	62	70	30	37.5	10	11.0
53	69	65	73	30	37.5	10	11.0
55	71	67	75	30	37.5	10	11.0
60	80	72	80	33	40.5	12	12.7
65	85	77	85	33	40.5	12	12.7
70	90	83	92	33	48.0	12	12.7
75	99	88	97	40	48.0	12	12.7