


DEMS 580B

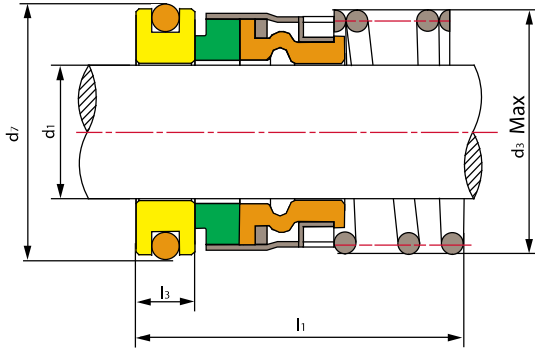

John Crane Type 1A(Avrupa standardı) mudaili.
DEMS 580B Replace John Crane Type 1A(European Standard).

Çalışma Limitleri

Basınç: ≤ 2.8 MPa
Hız: ≤ 13 m/s
Sıcaklık: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: ≤ 2.8 MPa
Speed: ≤ 13 m/s
Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

56

- Döner Yüzey (Carbon/SiC/TC)
- Sabit Eleman(Ceramic/SiC/TC/SUS304)
- Elastomer(NBR/EPDM/VITON)
- Yay & Diğer Parçalar (SUS304/SUS316)

- Rotary Ring(Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC/SUS304)
- Secondary Ring(NBR/EPDM/VITON)
- Spring & Other Parts(SUS304/SUS316)

Model	d_1 (mm)	d_3	d_7	l_1	l_3
DEMS580B-14	14	29	25	52	8
DEMS580B-16	16	29	27	52	8
DEMS580B-18	18	32	33	52	8
DEMS580B-19	19	32	35	52	8
DEMS580B-20	20	33	37	52	8
DEMS580B-24	24	38	39	52	8
DEMS580B-25	25	38	40	52	8
DEMS580B-28	28	46	43	69	9
DEMS580B-30	30	49	45	69	9
DEMS580B-32	32	49	48	69	9

Model	d_1 (mm)	d_3	d_7	l_1	l_3
DEMS580B-35	35	52	50	70	10
DEMS580B-38	38	56	56	70	10
DEMS580B-40	40	59	58	70	10
DEMS580B-45	45	62	63	81	10
DEMS580B-48	48	65	66	81	10
DEMS580B-50	50	68	70	81	10
DEMS580B-55	55	75	75	83	12
DEMS580B-60	60	78	80	83	12
DEMS580B-65	65	86	85	83	12