


# DEMS 750



**Yaprak Yaylı** Wave Spring

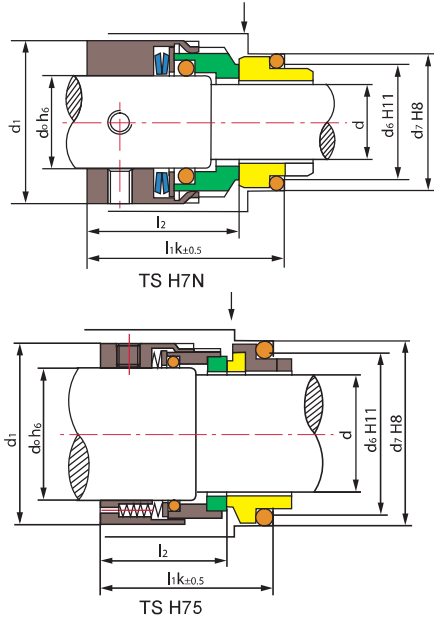

**Kurt Yaylı** Multiple Spring

## Çalışma Limitleri

Basınç:  $\leq 2.5\text{MPa}$   
 Hız:  $\leq 20\text{m/s}$   
 Sıcaklık:  $-20^{\circ}\text{C} \sim +200^{\circ}\text{C}$

## Operating Limits

Pressure:  $\leq 2.5\text{MPa}$   
 Speed:  $\leq 20\text{m/s}$   
 Temperature:  $-20^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Döner Yüzey (SiC/TC/Carbon)
- Sabit Eleman (Carbon/SiC/TC)
- Elastomer (VITON/Encapsulated Ring)
- Metal Aksam (SUS304/SUS316)
- Yay (17-7PH/SUS304/SUS316)

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring)
- Metal Parts(SUS304/SUS316)
- Spring(17-7PH/SUS304/SUS316)

Seal size d(mm)	d <sub>0</sub>	d <sub>1</sub>	d <sub>6</sub>	d <sub>7</sub>	l <sub>2</sub>	l <sub>k</sub>
25	30	45	34	40	36.0	47.5
28	33	48	37	43	38.5	50.0
30	35	50	39	45	38.5	50.0
33	38	55	42	48	38.5	50.0
35	40	57	44	50	38.5	50.0
38	43	60	49	56	38.5	52.5
40	45	62	51	58	38.5	52.5
43	48	65	54	61	38.5	52.5
45	50	67	56	63	38.5	52.5
48	53	70	59	66	38.5	52.5
50	55	72	62	70	42.5	57.5
53	58	79	65	73	42.5	57.5
55	60	81	67	75	42.5	57.5
60	65	86	72	80	47.5	62.5
65	70	91	77	85	47.5	62.5
70	75	99	83	92	52.0	70.0
75	80	104	88	97	52.0	70.0
80	85	109	95	105	51.8	70.0
85	90	114	100	110	56.8	75.0
90	95	119	105	115	56.8	75.0
95	100	124	110	120	57.8	75.0